


BROAN *ELITE* RMP17004 POWER PACK

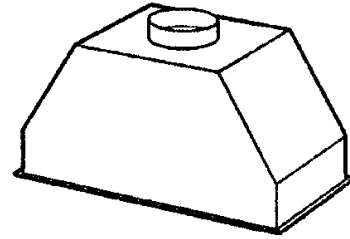

Designed to fit flush with the bottom of a cabinet or custom hood for an exceptional custom mounted look.

FEATURES

- 430 stainless steel #4 brushed construction
- Fully enclosed bottom
- 6" round vertical discharge
- 400 CFM (188.7 L/s) centrifugal blower
- Multispeed control
- Two halogen lamps (2 x 20 W, type MRT4) included
- Dishwasher-safe aluminum filter features a quick-release latch and professional style appearance
- 27 5/16" wide design fits cabinet or custom hood that's 30" to 42" wide

OPTIONS

- Replacement grease filters available (Part No. B08087153)
- Non-ducted filter (Model FILTEREB40)
- Exterior blower version (RMPE7004) available, providing 600, 900, or 1200 CFM (283, 424.5, 566 L/s) exhaust

TYPICAL SPECIFICATIONS

Range Hood shall be Broan Elite Model RMP17004.

Unit shall be convertible between ducted (using a washable aluminum filter) and non-ducted (using a recirculation kit).

Motor to be permanently lubricated.

Unit shall have multispeed fan switch and separate light switch. Bottom shall be fully enclosed.

Air delivery shall be no less than 400 CFM (188.7 L/s).

Unit shall be cULus listed.



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. (2.54 mm) static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.



Broan-NuTone LLC, 926 West State Street, Hartford, WI 53027 USA (1-800-637-1453)

Broan-NuTone Canada Inc., 1140 Tristar Drive, Mississauga, Ontario L5T 1H9 CANADA (1-888-882-7626)


REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date

PERFORMANCE RATINGS


BROAN ELITE RMP17004 POWER PACK

SPECIFICATIONS


VOLTS	AMPS	CFM (L/s)	DUCT (mm)
120	3.1	400 (188.7)	6" round

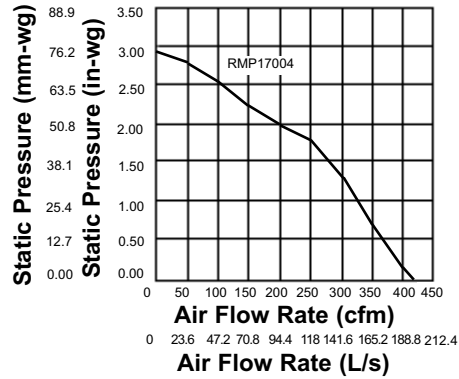


RMP17004 MOUNTING

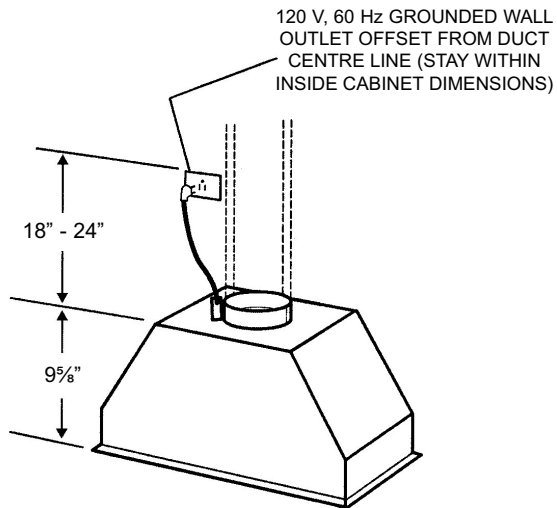

RMP17004 MOUNTING

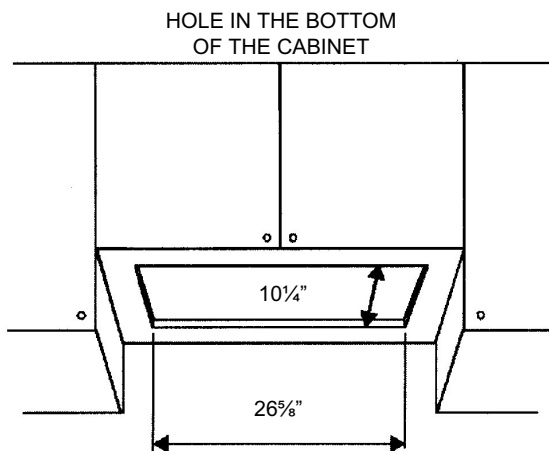

RMP17004 DIMENSIONS

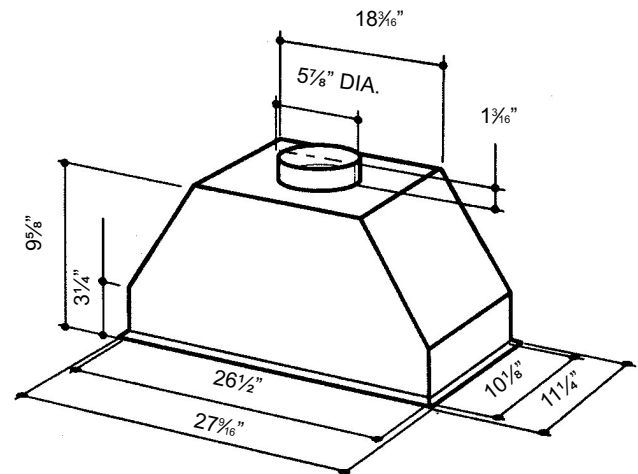

Mount power pack so bottom of unit is 24" to 30" above cooking surface.



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. (2.54 mm) static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

